



Dishwasher

DF1563.U
30 series

Noise level (max): 42 dB(A)

Number of place settings: 14 pcs

Number of racks: 3

Size: XL

Auto Door Open Drying™

Residual heat

ADA Compliant: Yes

Installation: Panel ready



Construction and performance

- Vital parts of the dishwasher made in stainless steel
- No need to rinse the dishes thanks to Super Cleaning System™
- Number of spray arms: 3 pcs
- Number of spray zones: 8
- Cleaning systems: Stainless steel spray arms, Aqua Level™ Sensor, No need to rinse the dishes thanks to Super Cleaning System™, Sensi Clean™ Sensor - measures dirtiness level, 2 x WideClean

Use and flexibility

- Number of place settings: 14 pcs
- Number of racks: 3
- Top tray: Handle, With telescopic rails, Dividable and removable
- Upper rack type: Core Premium
- Upper basket: Small distance between the basket threads - makes loading easy and prevents small items to fall through, Handle with plastic logotype, Foldable wine shelves to left, Foldable wine shelves to right, Fixed pin rows, Fixed glass support, Standard knife stand, Perfect ergonomoy with easy sliding telescopic rails
- Middle basket: Without middle basket
- Lower rack type: Core Premium
- Lower rack: Cutlery basket, Foldable/divisible rear pin row, Handle with plastic logotype, Small distance between the basket threads - makes loading easy and prevents small items to fall through.

Interaction and control

- Type of display: Fully graphical FFSTN
- Status Light™ - Visual indication of dishwashing progress with spot on floor.
- Remaining time indication
- Wash end indication: Displayed with sound and light
- Language settings: Ukrainian, Swedish, Serbian, Slovenian, Slovak, Russian, Portuguese, Polish, Norwegian, Dutch, Latvian, Lithuanian, Japanese, Italian, Croatian, French, Finnish, Estonian, Spanish, English, German, Danish, Czech

Functions, programs and modes

- Programs: Self cleaning, Rinse and hold programme, Time program, Standard, Intensive program, Quick wash, Auto wash, Sanitize
- Delayed start: Possible to delay up to 24 hours
- Options and modes: Night mode - Lower noise level (the program time is extended) | Speed mode - The program time is shortened (more energy is used) | Time set | Super Rinse™ - Two extra rinses | Enable/disable automatic door opening

Design and integration

- From the front adjustable door spring
- From front adjustable rear foot
- Installation: Velcro strips for easy mounting and adjustment of the separate custom door, Multi fit outlet hose, Integrated anti-siphon - Prevents spontaneous in- and outlet of water and simplifies elevated installation, Steam protection strip.
- Possible to install elevated
- Custom door size: Custom door size: 26 ³/₄ - 28 ³/₈ (680-720)
- Min. niche width: min 23 ⁵/₈ (600)
- Min. niche height: min 33 ⁷/₈ (860)
- Depth (incl. wall spacing): min 21 ⁷/₈ (555)
- Max Height adjustment: 1 ¹⁵/₁₆ (50)
- Adjustable kick plate: 4 ¹/₄ (108)

Safety and maintenance


- Aqua Safe™: Anti Block™ - Self cleaning drain pump, Light and sound alarm, Maximum time for water intake, Extra durable PEX inlet hose, Stand-by water protection - Leakage detection when machine is off, Aqua Level™ Sensor - Ensures an optimized water level, Aqua Detect™ - Instant recognition of any leakage in the motor compartment, Detection of water leakage on the bottom plate, Waterproof bottom plate, Sealing points outside container
- Child safety: Kid Safe™ - Lockable controls
- Indication of low level of rinse-aid: Notification in display


Dimensions


- Width: 23 ½ (597 mm)
- Height: 32 ¾ - 35 1/16 (817-891 mm)
- Depth: 21 7/8 (555 mm)
- Maximum product height: 35 1/16 (891 mm)
- Length of electrical cord: 59 1/16 (1500 mm)
- Depth with door open: 45 3/8 (1152 mm)
- Length inlet hose: 70 7/8 (1800 mm)
- Length outlet hose: 59 1/16 (1500 mm)

Technical data


- Water connection: Hot or cold
- Max. temperature of inflow water: 140 °F
- Noise level (max): 42 dB(A)
- Duration of standard programme: 120 min
- Estimated yearly energy consumption: 205 kWh
- Energy consumption - normal program: 0.9 kWh
- Estimated annual water consumption: 647.5 gal
- Water consumption: 3 gal
- Power consumption in standby mode: 1.7 W
- Plug type: USA
- Connected load: 1300 W
- Voltage (V): 120 V
- Number of phases: 1
- Fuse: 15 A
- Frequency: 60 Hz
- Required inlet water pressure psi: 0,3-1
- Net weight: 71.7 lb

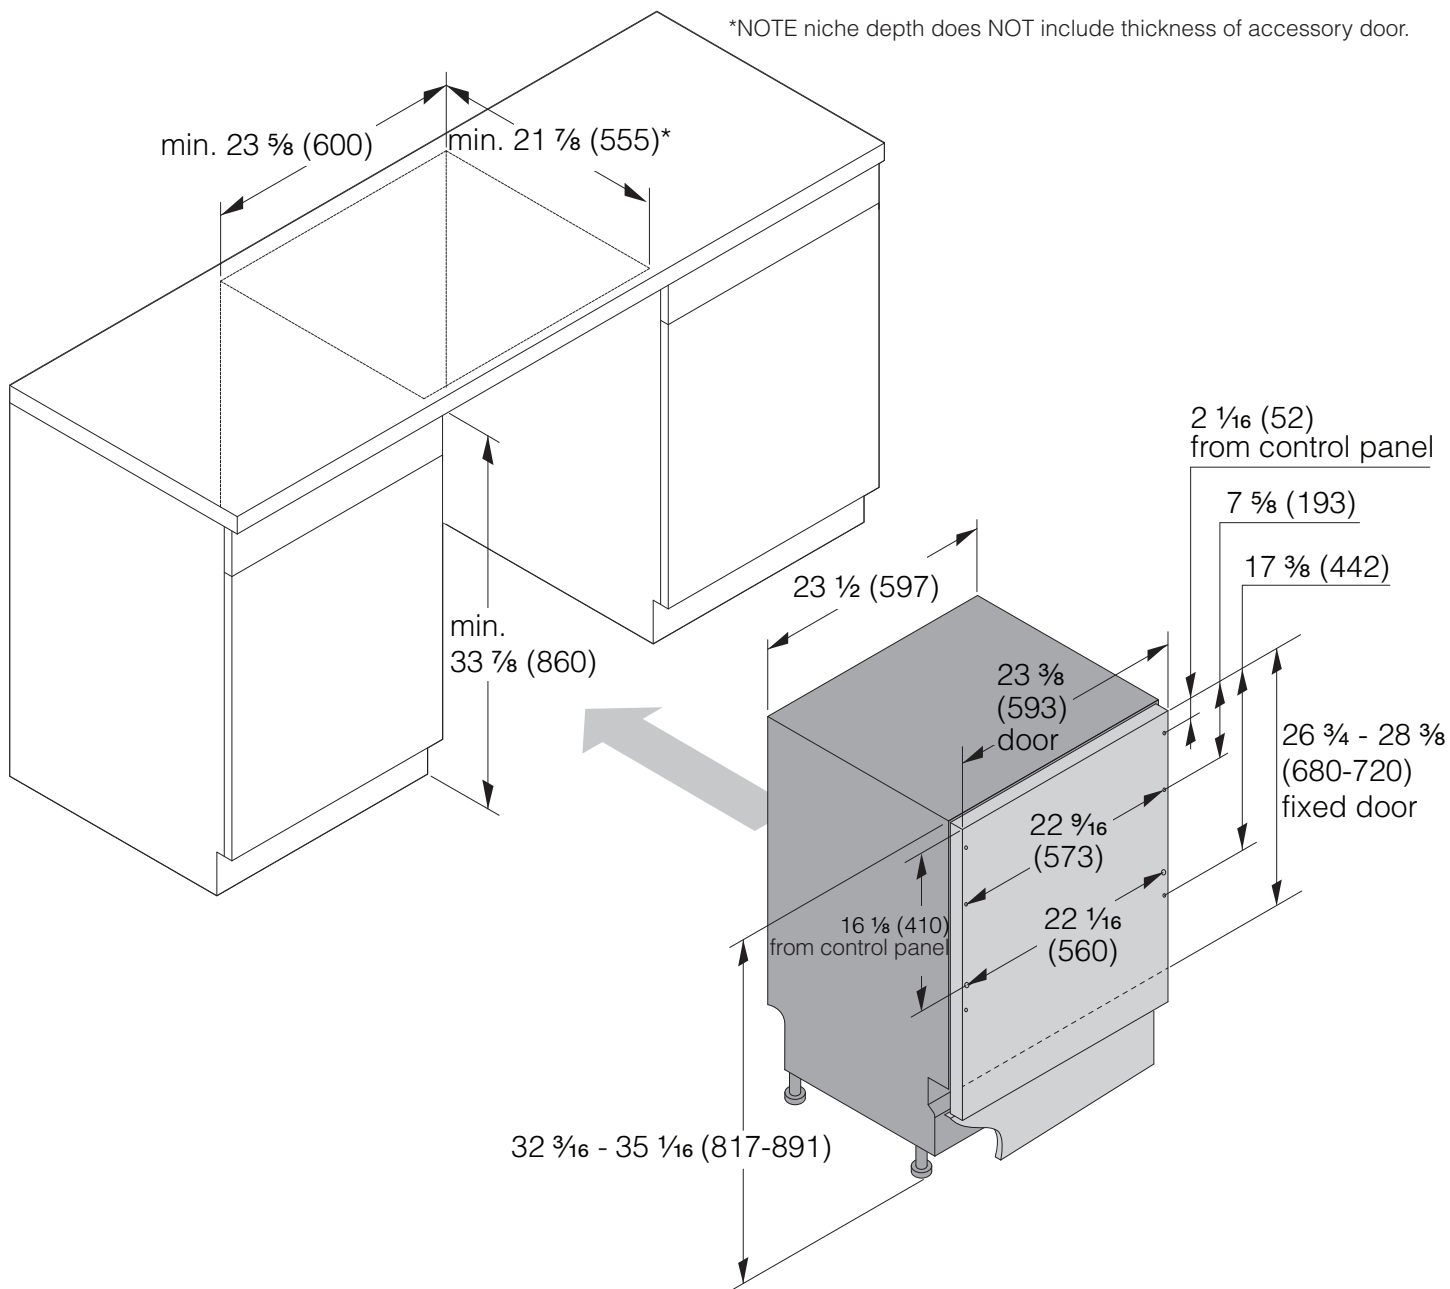

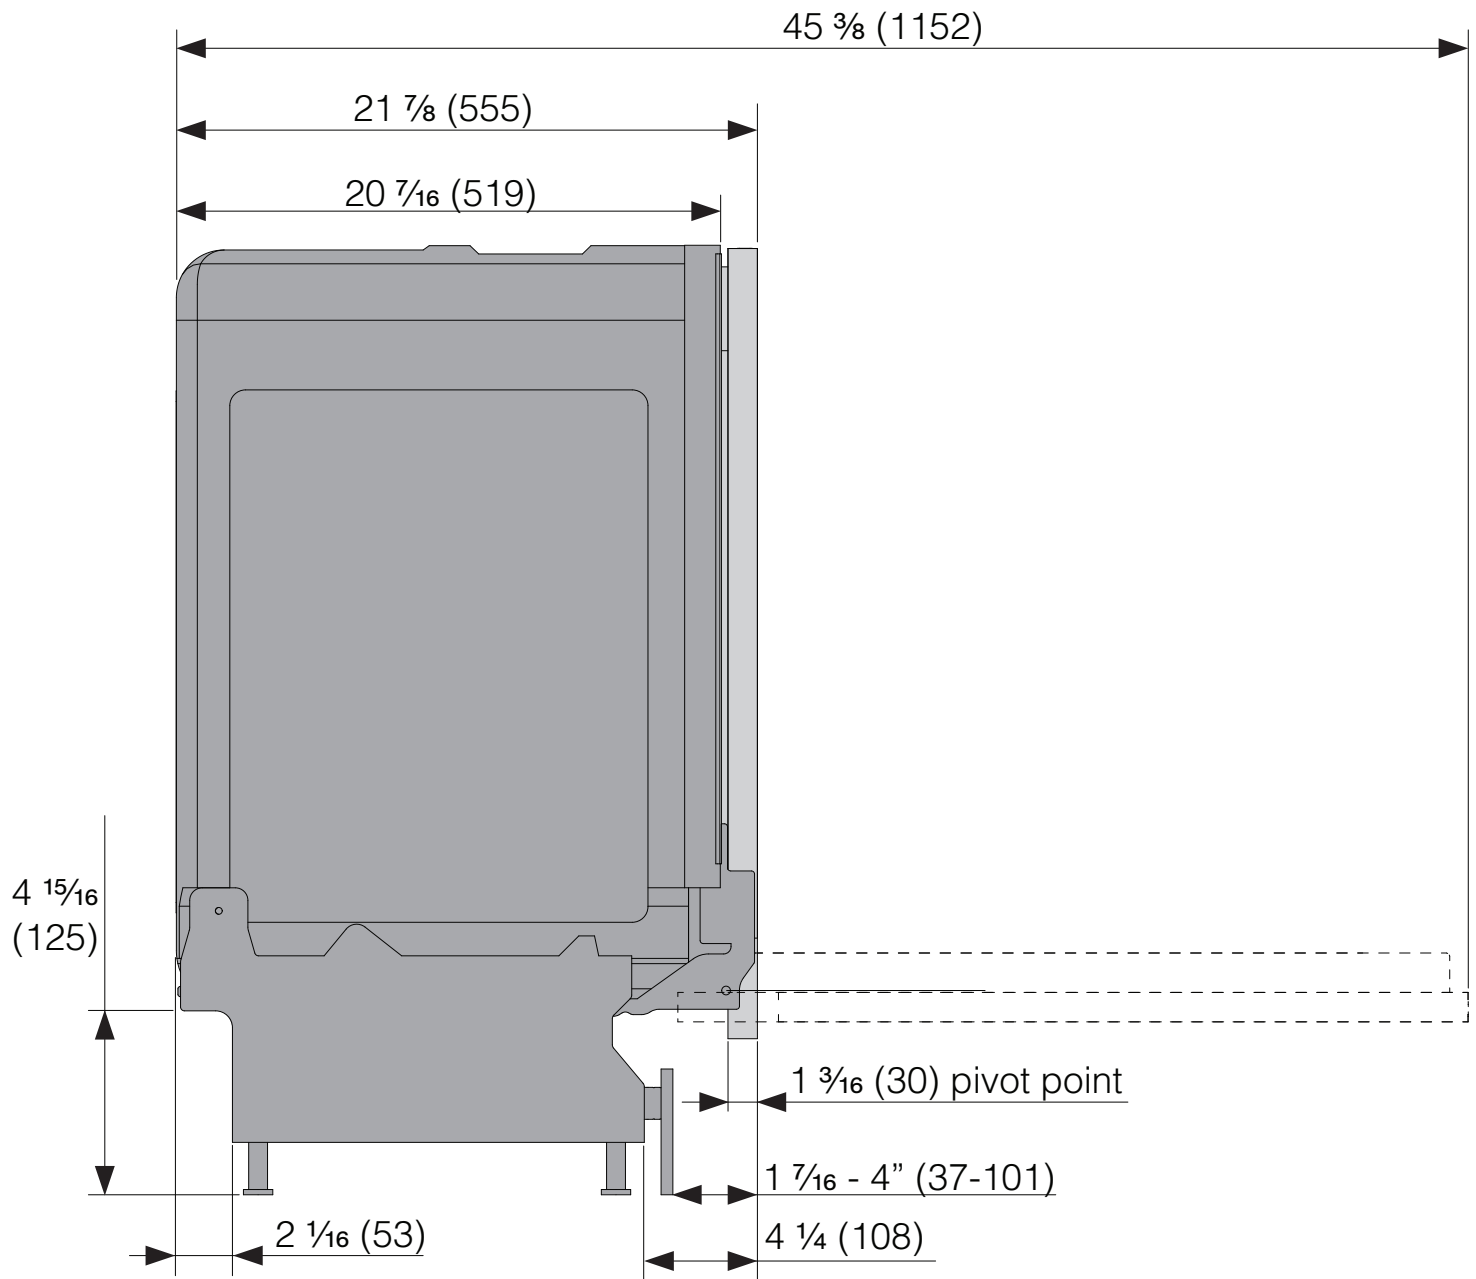

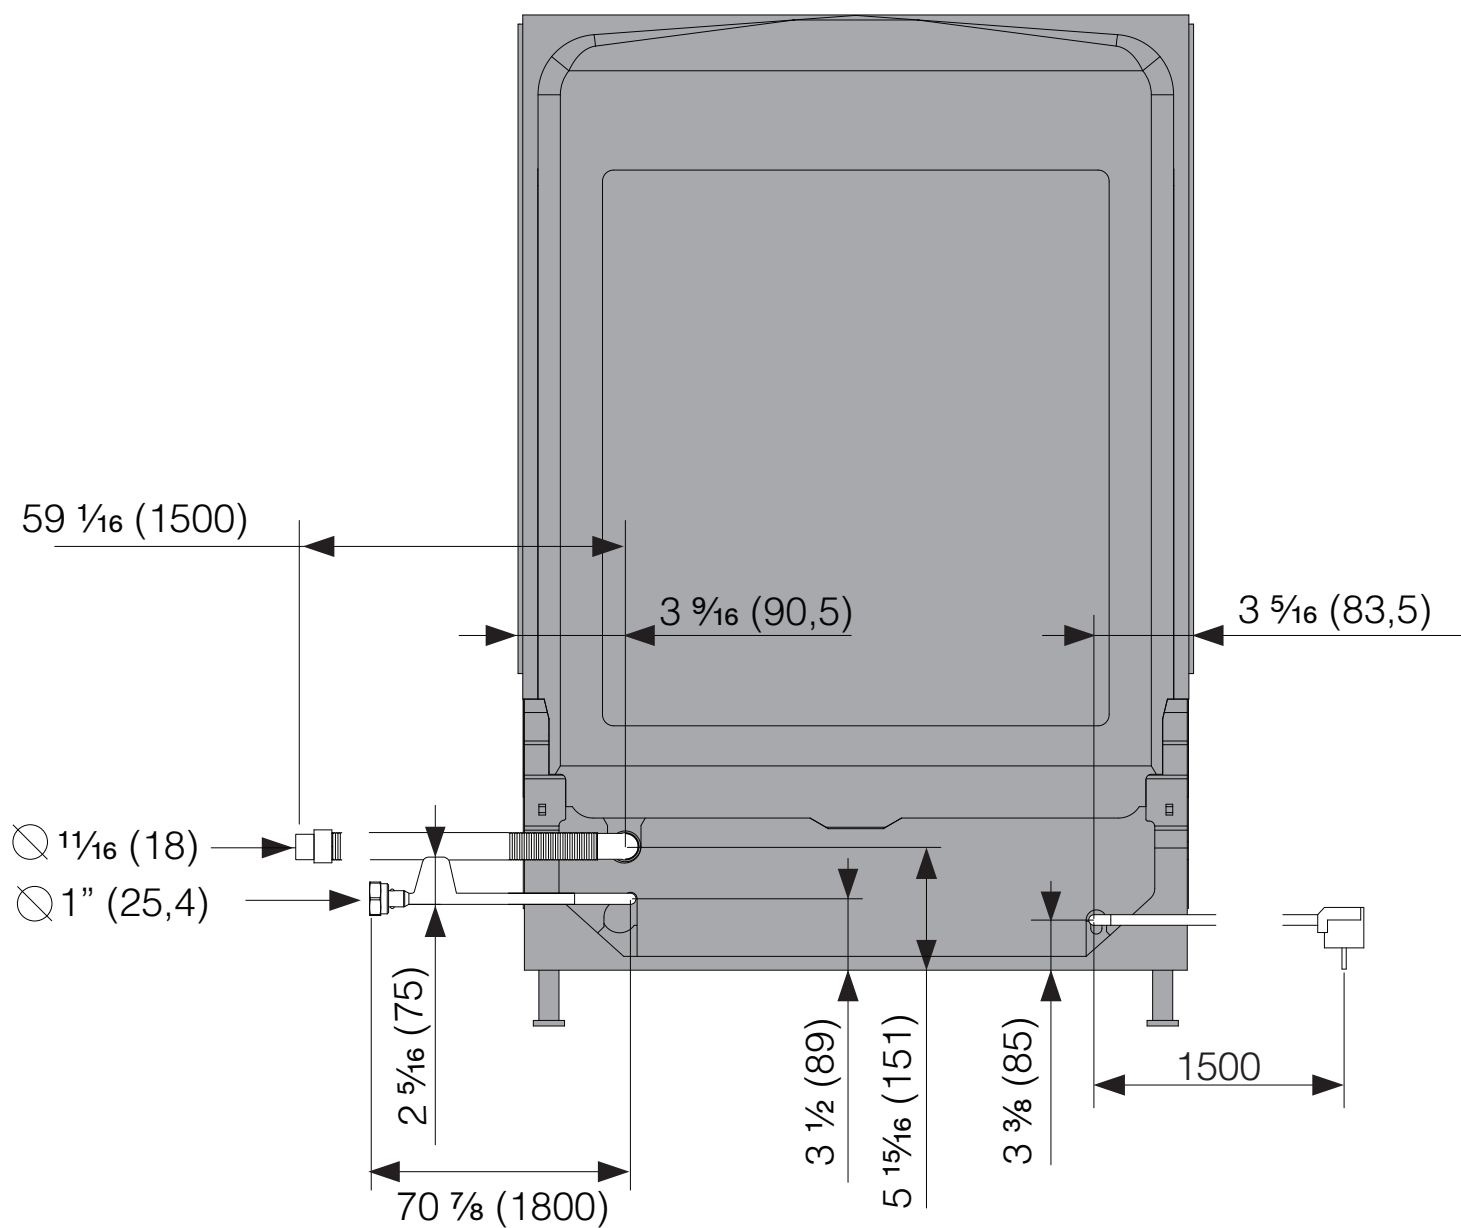

Trajectories lower tip of door panel

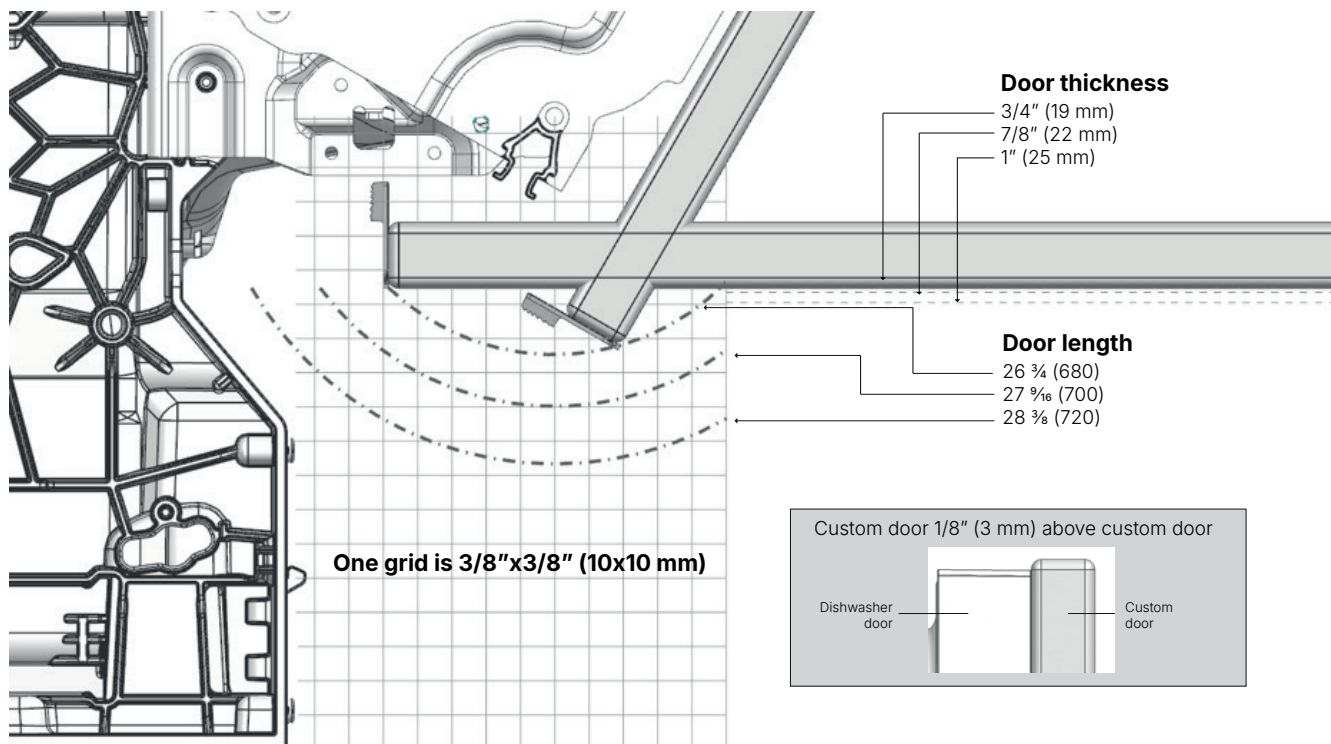



5995 Windward Pkwy | Alpharetta, GA 30005 | 800-898-1879